

# DocuCentre-IV 3060 / 2060

Digital Multifunction Device



# Powerful Function

## A monochrome device can be used for color scanning\*1

Scan

Both color and monochrome originals can be scanned at a speedy 55 ipm\*2 for all models. In addition to determining whether an original is in color or monochrome, the DocuCentre-IV 3060/2060 automatically determines the size of originals, making it possible to quickly scan a large quantity of paper documents.

\*1 Optional. The Scanner Kit, HDD Extension Kit are required.

\*2 Fuji Xerox Standard Document (A4LEF), 200 dpi, stored to mailbox



Scan	
Color <b>55</b> ppm <sup>*1</sup>	Monochrome <b>55</b> ppm <sup>*1</sup>
Copy Monochrome <b>30</b> ppm <sup>*2</sup>	Print Monochrome <b>30</b> ppm <sup>*2</sup>
Fax Super <b>G3</b> Compatible	



\* The above shows the DocuCentre-IV 3060 PF model.

\*1 Fuji Xerox Standard Document, A4LEF, scan to mailbox

\*2 When using A4LEF, DocuCentre-IV 3060. 25ppm when using DocuCentre-IV 2060.

	Copy	Print	Fax	Scan	Duplex Automatic Document Feeder	HD
DC model	●	○	○	○	○	○
F model	●	○	●	○	●	●
PF model	●	●	●	○	●	●

●: Standard ○: Optional

# User Friendly

## New 7-inch color TFT touch panel

The user interface has been made more graphical by changing many text items into colorful icons. The buttons are bigger and the text is easier to read, improving both operability and visibility. Easy-to-see LED indicators also let you check when paper has run out or jammed from a distance.



## Simplified screens

Copy Fax

In addition to standard copy and fax\* screens, the DocuCentre-IV 3060/2060 also offers simple copy screen and simple fax screen\*. These screens show only the basic settings, so jobs can be specified quickly and easily. With a 5 mm font size, text is also easy to see.

\* The fax function is optional in the DC model. A Fax Kit, HDD Extension Kit are required.



simple copy screen



simple fax screen

## Scanning directly to USB memory\*

Scan

The control panel includes a USB memory port. Any commercial USB memory stick can be inserted and scanned documents can be saved directly to the inserted device. Documents can also be scanned directly to a computer or sent by e-mail.

\* Optional. A Scanner Kit, Scan to USB Kit, Printer kit, HDD Extension Kit are required.



# Compact

## Standard paper feeding capacity of 2,290 sheets

Copy Print Fax

In spite of its compact size, the DocuCentre-IV 3060/2060 has a total paper capacity of 2,290 sheets: 560 sheets in each of the four trays (2,240\* sheets in total) and an additional 50\* sheets in the by-pass tray. This means you don't have to worry about the paper running out regardless of whether you are performing daily office jobs or large-volume output jobs.

\* Fuji Xerox "P" paper.



Main unit trays



By-pass tray

## Sorting to three output trays selectable according to the function or purpose

Copy Print Fax

Trays can be specified for each job so that copy, print\*1, and fax\*1 outputs do not get mixed up. When multiple fax lines are introduced, the output trays can be assigned for each line\*2.

※ When optional Inner Catch Tray and Side Tray are installed.

\*1 Optional

\*2 When optional G3 Extension Port Kit and Fax Port Extension Kit are installed.



# Economy


## Power saving design with only 2.0W in sleep mode

Recovery from sleep mode takes only 13 seconds\*1.

DocuCentre-IV 2060 achieved 1.56kWh for the Typical Electricity Consumption (TEC)\*2, a compliance standard with the International Energy Star Program.

\*1 May take longer when the machine is in image quality adjustment mode.


\*2 Measured as defined by the Energy Star Program. DocuCentre-IV 3060 is 1.85kWh.

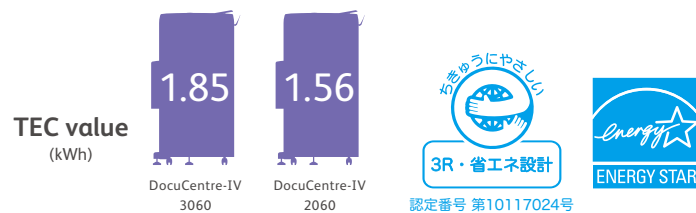

## 2-Up and duplex printing features save paper and toner

Copy Print


The DocuCentre-IV 3060/2060 includes a 2-Up feature enabling images on two sheets to be reduced and printed on one sheet. By combining this feature with duplex copying, four sheets can be printed on a single sheet, leading to considerable reduction in paper and toner use.

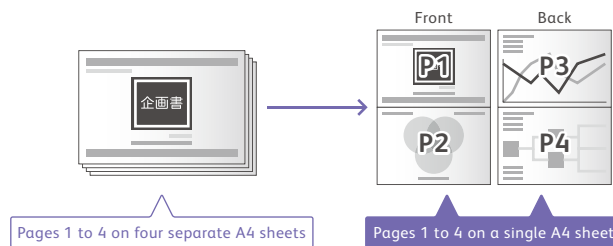

## Promote eco printing with eco level indicator

Print

With the leaf images on the Document Monitor, user can now check if their printing behavior contributed to eco printing. This indicator will also help to increase user's eco awareness.

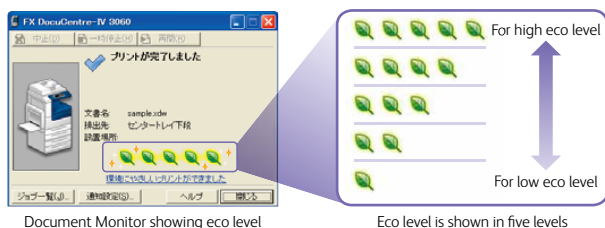

## Wide range of fax features to lower costs\*1

Fax

### Incoming faxes

Incoming faxes can be viewed as thumbnail images on the control panel for user to select and print only the necessary documents.

### Block unwanted fax

You can choose not to accept certain faxes to weed out faxes from unwanted sources such as direct mail marketing companies.

### Outgoing faxes

Faxes can be sent directly from your computer.

### Internet Fax\*2

Faxes can be sent and received as e-mail attachments, eliminating communication expenses.

### IP Fax (SIP)\*3

Highly reliable and cost-saving facsimile transmission between IP fax devices is now available.

\*1 The fax feature is optional in the DC model. A Fax Kit, HDD Extension Kit are required.

\*2 Internet Fax Kit, Printer Kit, A Fax Kit, HDD Extension Kit are required.

\*3 IP(SIP) Fax Kit, Printer Kit, HDD Extension Kit are required.

# Major Specifications of DocuCentre-IV 3060 / 2060

## Fundamental Function/Copy Function

		DocuCentre-IV 3060	DocuCentre-IV 2060
Type		Console Type	
Memory <sup>*1</sup>		DC model: 1GB(Max: 2GB), F/FP model: 1GB(Max: 2GB)	
HDD <sup>*2</sup>		160GB (available capacity: 40GB)	
Scanning Resolution		600x600dpi	
Printing Resolution		600x600dpi	
Halftone/Printable Colors		256 levels	
Warm-up Time <sup>*3</sup>		DC model: 25 seconds or less, 14 seconds or less when the main power is on (at room temperature of 20°C) F/FP model: 32 seconds or less, 23 seconds or less when the main power is on (at room temperature of 20°C)	
Original Paper Size		Maximum for sheet and book: 297x432 mm (A3, 11x17")	
Output Paper Size	Max.	A3, 11x17"	
	Min.	A5	
		[For By-pass Tray: Postcards (made by Japan Post Service Co., Ltd.), envelope (120x235mm)]	
	Image Loss	Lead edge 4mm or less, Trail edge 4mm or less, Right & Left Edges 4mm or less	
Output Paper Weight <sup>*4</sup>	Trays	Tray1: 60-105g/m <sup>2</sup> , Tray2-4: 60-215g/m <sup>2</sup>	
	By-pass Tray	60-215g/m <sup>2</sup>	
First Copy Output Time		4.2 seconds (A4LEF)	
Reduction/Enlargement	100%	1: 1±0.7%	
	Preset	1:0.500, 1:0.707, 1:0.816, 1:0.866, 1:1.154, 1:1.225, 1:1.414, 1:2.000	
	Variable	1: 0.25-1.400 (by 1% increments)	
Continuous Copy Speed <sup>*5</sup>	A4LEF/BSLEF	30cpm	25cpm
	A4	22cpm	20cpm
	B5	30cpm	25cpm
	B4	19cpm	16cpm
	A3	16cpm	14cpm
Paper Tray/Capacity <sup>*6</sup>	Standard	560 sheets x 4 trays + 50 sheets (By-pass Tray)	
	Maximum Paper Capacity	2,290 sheets [standard]	
Continuous Copy <sup>*7</sup>		999 sheets	
Output Tray Capacity <sup>*6/8</sup>		500 sheets (A4LEF), 250 sheets (A3)	
Power Supply		AC100V±10%, 15A, 50/60Hz (2 power supplies)	
Power Consumption		1.5kW or less, Sleep Mode: 2.0W or less, Standby Mode: 130W or less (DC model), 140W or less (F/FP model)	
Energy Efficiency	18Wh/h DC model	20Wh/h DC model	
	Dimensions	DC model: (W)596 x (D)640 x (H)1,029mm F/FP model: (W)596 x (D)640 x (H)1,115mm (with Duplex Automatic Document Feeder)	
Machine Weight <sup>*9</sup>	DC model:	109kg	
	F/FP model:	115kg (with Fax and Duplex Automatic Document Feeder)	
Space Requirement <sup>*10</sup>	DC model:	(W)930 x (D)640 mm	
	F/FP model:	(W)975 x (D)640 mm (with Duplex Automatic Document Feeder)	

\*1: To upgrade to 2GB, it is necessary to remove 1GB memory and install 2GB memory. \*2: Not all of the indicated hard disk capacity may be available. \*3: Warm-up time may take longer due to image quality adjustment. \*4: Use of Fuji Xerox brand paper is recommended. Document may not be printed correctly depending on usage conditions. \*5: The speed may be lower due to image quality adjustment. \*6: Fuji Xerox "P" paper. \*7: In order to stabilize the image quality, machine may stop its operation temporarily. \*8: When the optional inner catch tray is installed, the capacity of the center tray is 250 sheets (A4LEF), and that of the inner catch tray is 250 sheets (A4LEF). \*9: Excluding toner cartridges. \*10: when by-pass tray is extended.

## Fax Function (Optional)

Item	Description	
Send Document Size	Max.: A3, 11x17". Long size document (Max. 600mm)	
Recording Paper Size	Max.: A3, 11x17". Min.: A5	
Transmission Time	Less than 2 seconds <sup>*1</sup>	
Transmission Mode	G3	
Scanning Resolution	Standard	8x3.85 lines/mm, 200x100dpi
	Fine	8x7.7 lines/mm, 200x200dpi
	Super Fine (400dpi)	16x15.4 lines/mm, 400x400dpi
	Super Fine (600dpi)	600x600dpi
Coding Method	MH, MR, MMR, JBIG	
Transmission Speed	G3: 33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4kbps	
No. of Fax Lines	Telephone subscriber line, PBX, facsimile communication network (PSTN), Max. 3 ports <sup>*2</sup> (G3-3 ports)	

\*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8x3.85 lines/mm) and in high speed mode (28.8kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. \*2: Up to three lines can be connected. Number of ports is that of the channels that can be used for communication.

## Internet Fax Function (Optional)

Item	Description	
Document Size	A3, B4, A4	
Scanning Resolution	Same as those in Fax Function	
Output Format	Format: TIFF-FX, Compression method: MH, MMR, JBIG	
Profile	TIFF-S, TIFF-F, TIFF-J	
Protocol	To send: SMTP. To receive: SMTP, POP3	
Connectivity	Standard	Ethernet 100BASE-TX/10BASE-T
	Optional	Ethernet 1000BASE-T

## Duplex Automatic Document Feeder

Item	Description
Type	Duplex Automatic Document Feeder
Original Paper Size/Output Paper Weight	Max.: A3, 11x17", Min.: A5, 38-128g/m <sup>2</sup> (Duplex: 50-128g/m <sup>2</sup> )
Capacity <sup>*</sup>	110 sheets
Feeding Speed (A4 LEF)	Monochrome: 35cpm
Dimensions / Machine Weight	(W)540 x (D)492 x (H)125mm, 8kg

\*: Xerox P paper.

\* If the storage media (hard disk) of the product fails, the data received, stored, or registered in the media may be erased. Fuji Xerox will not be held responsible for any damage caused due to such loss of data.

\* Key repair components will be available for at least 7 years after the product is no longer manufactured.

## Print Function

Type	Item	Description
		Built-in Type
Continuous Print Speed		Same as those shown in Fundamental Function/Copy Function
	Output	600x600dpi, 1,200x1,200dpi
Print Resolution	Data Processing	Standard: 300x300dpi, High quality <sup>*1</sup> : 1,200x1,200dpi
	PDL	Standard: ART EX Optional: Adobe® PostScript® 3 <sup>TM</sup>
Protocol		TCP/IP (Ipd, IPP, Port9100, SMB, WSD, Novell® NetWare®, BMLinks®, ThinPrint®), Novell® NetWare® (IPX/SPX), NetBEUI (SMB), EtherTalk <sup>*2</sup>
Operating System <sup>*3</sup>	Standard	[ART EX Driver] Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows® 7 64-bit Japanese/English, Windows Server® 2008 R2 (x64) Japanese/English [Mac OS X Driver] Mac OS X 10.5-10.6 Japanese/English
	Optional	[Adobe® PostScript® 3 <sup>TM</sup> Kit] Windows® 2000 Japanese/English <sup>*4</sup> , Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows® 7 64-bit Japanese/English, Windows Server® 2008 R2 (x64) Japanese/English, Mac OS 9.2.2 Japanese/English, Mac OS X 10.3.9-10.4.6/10.4.8-10.4.11/10.5/10.6 Japanese/English
Fonts	Standard	Outline (Heisei-Mincho <sup>TM</sup> W3, Heisei-Kaku-Gothic <sup>TM</sup> W5, European 19 Fonts), Stroke (Japanese Fonts, European Fonts: for HP-GL)
	Optional	[Adobe® PostScript® 3 <sup>TM</sup> Kit] Heisei 3 Fonts: Japanese 3 Fonts (Heisei-Mincho <sup>TM</sup> W3, Heisei-Kaku-Gothic <sup>TM</sup> W5, Heisei-Maru-Gothic <sup>TM</sup> W4), European 136 Fonts, Morisawa 2 Fonts: Japanese 2 Fonts (Ryumin L-KL <sup>TM</sup> , Middle Gothic BBB <sup>TM</sup> ), European 136 Fonts [Emulation Kit] European 82 Fonts, Symbol 37 Sets
Emulation	Standard	ART IV, ESC/P (VP-1000), BMLinks®, PDF, XPS, Docuworks, TIFF, JPEG
	Optional	[Emulation Kit or Adobe® PostScript® 3 <sup>TM</sup> Kit] PC-PR201H, HP-GL (HP7586B), HP-GL2/RTL (HP Design Jet750C Plus), PCL5/PCL6
Connectivity	Standard	Ethernet 100BASE-TX/10BASE-T, USB2.0 <sup>*5</sup>
	Optional	Ethernet 1000BASE-T

\*1: Printing speed may be lower depending on documents when printed in high resolution mode. \*2: The optional Adobe® PostScript® 3<sup>TM</sup> kit is required. Supports Mac OS 8.6/9.2.2 Japanese, Mac OS X 10.3.9-10.4.6/10.4.8-10.4.11/10.5-10.6 Japanese. \*3: Please refer to the Fuji Xerox web site about the latest compliant OS information. \*4: Windows® 2000 Japanese/English Service Pack 3 or later version must be applied. \*5: Supports Windows® 2000/Windows® XP/Windows Server® 2003/Windows Server® 2008 (x86)/Windows XP Professional x64 Edition/Windows Server® 2003 x64 Editions/Windows Vista® 64-bit/Windows Server® 2008 (x64)/Windows® 7 (x64)/Windows Server® 2008 R2 (x64)/Mac OS X 10.3.9/10.4.11/10.5 Japanese. \*6: WSD: Web Services on Devices. \*7: XML Paper Specification. \*8: To print in a Linux® OS environment, please use the Japanese Linux® printer driver which can be downloaded from the Fuji Xerox web site as non-guaranteed software.

## Scan Function

Item	Description	
Type	Color Scanner	
Original Paper Size	Same as those shown in Fundamental Function/Copy Function	
Scanning Resolution	600x600dpi, 400x400dpi, 300x300dpi, 200x200dpi	
Scanning Halftone	10-bit input, 8-bit output for each RGB color	
Scanning Speed <sup>*1</sup>	Monochrome: 55ipm, Color: 55ipm	
	[Fuji Xerox standard document (A4LEF), 200dpi, Stored to folder]	
Connectivity	Standard	Ethernet 100BASE-TX/10BASE-T
	Optional	Ethernet 1000BASE-T
Scan to Folder	Protocol	TCP/IP (WebDAV, HTTP)
	File Format	Monochrome Binary: TIFF, DocuWorks <sup>2</sup> , PDF <sup>2</sup> , XPS <sup>2</sup> Grayscale: TIFF, JPEG <sup>2</sup> , DocuWorks <sup>2</sup> , PDF <sup>2</sup> , XPS <sup>2</sup> Full Color: TIFF, JPEG, DocuWorks <sup>2</sup> , PDF <sup>2</sup> , XPS <sup>2</sup> High-compression DocuWorks <sup>2,4</sup> , High-compression PDF <sup>2,4</sup> , High-compression XPS <sup>2,4</sup>
Save to PC	Driver	TWAIN
	Operating System <sup>*5</sup>	Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows® 7 64-bit Japanese/English, Windows Server® 2008 R2 (x64) Japanese/English
Save to PC	Protocol	TCP/IP (SMB, FTP)
	Operating System <sup>*5</sup>	Windows® 2000 Japanese/English, Windows® XP Japanese/English, Windows Server® 2003 Japanese/English, Windows Vista® Japanese/English, Windows Server® 2008 (x86) Japanese/English, Windows® 7 Japanese/English, Windows XP Professional x64 Edition Japanese/English, Windows Server® 2003 x64 Editions Japanese/English, Windows Vista® 64-bit Japanese/English, Windows Server® 2008 (x64) Japanese/English, Windows® 7 (x64) Japanese/English, Windows Server® 2008 R2 (x64) Japanese/English Mac OS X 10.2.x/10.3.8/10.3.9/10.4.2/10.4.4/10.4.8/10.4.9/10.4.10/10.5/10.6 Japanese/English, NetWare® (5.11J/5.12J) <sup>*6</sup>
Scan to e-mail <sup>*7</sup>	File Format	Monochrome Binary: TIFF, DocuWorks, PDF, XPS Grayscale: TIFF, JPEG, DocuWorks, PDF, XPS Full Color: TIFF, JPEG, DocuWorks, PDF, XPS, High-compression DocuWorks <sup>4</sup> , High-compression PDF <sup>4</sup> , High-compression XPS <sup>4</sup>
	Protocol	TCP/IP (SMTP)
Scan to e-mail <sup>*7</sup>	File Format	Monochrome Binary: TIFF, DocuWorks, PDF, XPS Grayscale: TIFF, JPEG, DocuWorks, PDF, XPS Full Color: TIFF, JPEG, DocuWorks, PDF, XPS, High-compression DocuWorks <sup>4</sup> , High-compression PDF <sup>4</sup> , High-compression XPS <sup>4</sup>

\*1: Scanning speed varies according to the document type. \*2: When scanned image is retrieved using CentreWare Internet Services. \*3: When Network Scanner Utility 3 is used. \*4: When the optional Image Compression Kit is installed. \*5: Please refer to the Fuji Xerox web site about the latest compliant OS information. \*6: Supports only FTP. \*7: Enabled when the optional E-mail kit is installed. \*8: XPS: XML Paper Specification.

### For Your Safe Use

• Before using the product, read the Instruction Manual carefully for proper use. • Use the product with an appropriate and adequate power source and voltage displayed. • Be sure to ground the machine. In the case of a failure or short circuit, an electric shock may result.

